



FT 0411


Fastape™ 0411 was designed for carpet protection in transportation and housing markets. Used for emblem mounting, pouches and overlaminates.

FEATURES:

- Specially designed mounting adhesive
- Easy release liner
- Polypropylene film

BENEFITS:

- Clean removal from plastics, wood, painted steel and glass surfaces
- Excellent resistance to UV light
- Excellent die-cutting characteristics
- Offers dimensional stability to the bonded substrate
- Acts as a transparent protective film, allowing perfect visual inspection during mounting

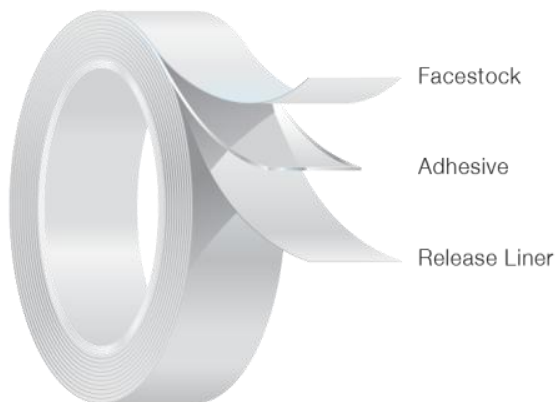

CONSTRUCTION:

Carrier:

Polypropylene

Adhesive

Removable Acrylic

Liner:

White Clay-coated paper

FT 0411

Adhesive Properties:		Typical Values		
Thickness	Test Method(s): PSTC-133	US Mils	MM's	Microns (µm)
Liner:		5.0	0.13	127
Adhesive:		0.9	0.02	23
Carrier:		4.0	0.10	102
Total Caliper:		9.9	0.25	251

PEEL ADHESION		Test Method(s): PSTC-101, ASTM D-3330, STD-10		
Product 180° 12" min				
Substrate		Lbf / In	US Oz / In	N / Meter
SS	20 min dwell	0.9	14	158
Painted Steel	20 min dwell	1.0	16	175
Polycarbonate	20 min dwell	1.7	27	298
PP	20 min dwell	0.8	13	140

LOOP TACK		Test Method(s): PSTC-16, STD-7		
Product 20" min				
Substrate		Lbf / In	US Oz / In	N / Meter
SS	Initial	1.7	27	298

STATIC SHEAR		Test Method(s): PSTC-107, ASTM D 3654, STD-9		
Product 1" sq (6.5 cm ²) 1000 g				
Substrate		Min to Fail		
SS	Initial	> 650		

TEMPERATURES	° F	° C
Min Application Temp	50 ° F	10 ° C
Max Continuous Operating Temp	155 ° F	68 ° C
Max Intermittent Operating Temp	176 ° F	80 ° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- One year when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2015 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

South America
Rua Francisco Foga, 225
13280-000 Vinhedo
SP Brazil
Phone: +55 19 3876 7736
Fax: +55 19 3876 7682

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469