



FT Y6663


Avery Dennison FT Y6663 is a double coated scrim tape with a hotmelt rubber adhesive. The high coating weight construction, specially designed high tack adhesive combined with a polyester scrim reinforcement is designed for bonding to (foamed) rubbers and plastics used in gaskets and weather seals. Typical performance designed for foamed EPDM-profiles.

FEATURES:

- Extremely high tack adhesive
- High coat-weight adhesive
- Specially designed adhesive
- Polyester scrim reinforcement
- Easy release glassine liner

BENEFITS:

- Provides a high initial tack and excellent adhesion over time to a wide variety of substrates
- Good bonding to uneven surfaces
- Ideal for bonding to foamed rubbers and plastics used in industrial and domestic gaskets and weather strips
- Imparts a high degree of resistance to volatile components of foamed rubbers and plastics
- Provides an excellent balance between strength and flexibility
- Excellent water jet and die cutting characteristics

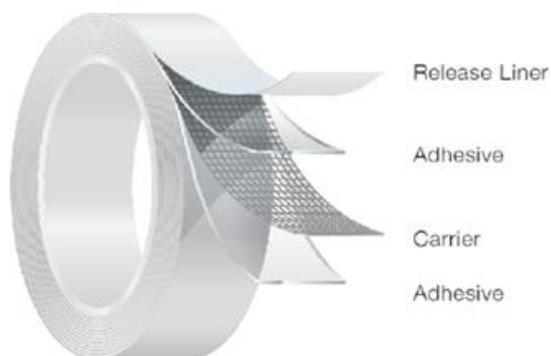

CONSTRUCTION:

Liner:

Havana (yellow/brown) glassine

Adhesive:

Hot melt rubber

Carrier:

Polyester scrim 8x2

Adhesive:

Hot melt rubber

FT Y6663

Adhesive Properties	Typical Values		
	US Mils	mm	Microns (µm)
THICKNESS			
Adhesive + Carrier	8.66	0.220	220
Liner	2.95	0.075	75
Total	11.61	0.295	295

*PSTC-133

PEEL ADHESION

2 mil PET; 180°; 12" / min

Substrate	Lbf / in		N / Meter	
	20 min	24 hr	20 min	24 hr
Stainless steel	14	15	2500	2600
ABS				
Polypropylene	11	12	2000	2100

*PSTC-101, ASTM D-3330, STD-10

LOOP TACK

2 mil PET; 90°; 20" / min; 1" sq (6.5 cm²)

Substrate	Lbf / in	N / Meter
Stainless steel	14	2400
Finat tack		

*PSTC-16, STD-7

STATIC SHEAR

Foil; 1" sq (6.5 cm²); 1000 g

Min to Fail

> 900

*PSTC-107, ASTM D 3654, STD-9

TEMPERATURES

Min. Application Temp.	50°F	10°C
Max. Continuous Operating Temp.	149°F	65°C
Max. Intermittent Operating Temp.	158°F	70°C

*TEST METHODS

Note: The listed values are typical only and not intended to serve as product specifications

APPLICATION TECHNIQUES

- It is essential with all pressure-sensitive tapes the application surface is clean, dry and free of grease and oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (firm / rigid) surface achieves different performance

STORAGE AND SHELF LIFE

The shelf life of the product is two years when stored at 18-22°C / 64-72°F, 30-70% relative humidity and out of direct sunlight, in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2018 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

Europe
Bld J.F. Kennedy 1
7060 Soignies
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469

For more information on our bonding tapes and adhesive solutions, visit Tapes.AveryDennison.com