



TEST REPORT

250 Chester Street
 Painesville, Ohio 44077
 Phone: **866-GO-AVERY (866-462-8379)**
 Fax: **888-358-4469**
 email: **psa.tape@averydennison.com**
 URL: **tapes.averydennison.com**

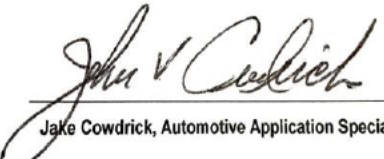
PRODUCT: **FBR 8950**
 SUPPORT: **NITRILE VINYL FOAM**
 SUBSTRATE: **PAINTED METAL**
 CERT NO.: **221209 - 0852**



FORD ESB-M3G76-B2
 OEM Rev Date: Sep 05
 Tape, PET - Two Sided PSA

TAPE REQUIREMENTS:

#REF!	#REF!	#REF!	#REF!	<u>Specification</u>	#REF!	<u>Results</u>	<u>Status</u>
#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!
#REF!	#REF!	#REF!	#REF!	<u>Specification</u>	#REF!	<u>Results</u>	<u>Status</u>
#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!
#REF!	#REF!	#REF!	#REF!	<u>Specification</u>	#REF!	<u>Results</u>	<u>Status</u>
#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!
#REF!	#REF!	#REF!	#REF!	<u>Specification</u>	#REF!	<u>Results</u>	<u>Status</u>
#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!	#REF!
SECTION 3.6.1 Peel Adhesion			ASTM D3330	<u>Specification</u>		<u>Results</u>	<u>Status</u>
3.6.1, Peel Adhesion, As Received, Initial RT				219 N / m		534.7	Pass
SECTION 3.6.2 Aged			ASTM D3330	<u>Specification</u>		<u>Results</u>	<u>Status</u>
3.6.2, Aged, Aged, 72 hrs @ RT				657 N / m		709.8	Pass
SECTION 3.6.3 Aged, Cycles			ASTM D3330	<u>Specification</u>		<u>Results</u>	<u>Status</u>
3.6.3, Aged, Cycles, CycleTest (5x)				438 N / m		680.7	Pass
4 hrs @ 70° C							
4 hrs @ 38° C / 95% RH							
16 hrs @ -29° C							
4 hrs @ 38° C / 95% RH							
4 hrs @ 70° C							
16 hrs @ -29° C							
SECTION 3.7 Migration Stain			FLTM BO 115-1*	<u>Specification</u>		<u>Results</u>	<u>Status</u>
3.7, Migration Stain, 48 Hour Fluorescence, White Enamel				None		Not Applicable	NA
SECTION 3.8 Liner Removal			ASTM D3330	<u>Specification</u>		<u>Results</u>	<u>Status</u>
3.8, Liner Removal, Initial Release				55 N / m		2.3	Pass
SECTION 3.9 Storage Stability				<u>Specification</u>		<u>Results</u>	<u>Status</u>
3.9, Storage Stability, Liner Removal after 12 Months Below 32°C				No Appreciable Difference		Not Tested	TBD

CERTIFIED BY: 
 Jake Cowdrick, Automotive Application Specialist

ISSUE DATE: 1-1-24

Materials tested to OEM requirements @ 72°F +/- 2°F and 50% RH +/- 5%. Test uncertainty and minor exclusions are available online or upon request.
 This certificate or report shall not be reproduced except in full, without the written approval of the Avery Dennison Performance Tapes.
 Status opinion based upon measurements obtained by personnel with appropriate training and professional experience.
 This laboratory is not accredited for the calibrations or tests marked *.