



250 Chester Street
Painesville, Ohio 44077

Phone: 866-GO-AVERY (866-462-8379)
Fax: 888-358-4469
email: psa.tape@averydennison.com
URL: tapes.averydennison.com

TEST REPORT

PRODUCT: FT 8392
SUPPORT: PVC FOAM
SUBSTRATE: SS PAINTED METAL
CERT NO.: 221209 - 1054


FORD ESB M3G102-A
OEM Rev Date: Sep 05
Tape, Low Density PVC Foam, Pressure Sensitive



TAPE REQUIREMENTS:

SECTION: 3.11 Pressure Sensitive Adhesion	ASTM D1000	Specification	Results	Status
3.11.1, Adhesion to Stainless Steel, Initial Room Temp		550 N / m	1181.5	Pass
SECTION: 3.11 Pressure Sensitive Adhesion	SAE J1434	Specification	Results	Status
3.11.2, Adhesion to Painted Metal, Initial Room Temp		550 N / m	1102.1	Pass
SECTION: 3.11 Pressure Sensitive Adhesive	SAE J1434	Specification	Results	Status
3.11.3, Adhesion to Stainless Steel, Heat Resistance, 30 mins @ 120° C		No Adhesion Failure	Good, Stable, No lifting or Adhesion Loss	Pass
SECTION: 3.11 Pressure Sensitive Adhesive		Specification	Results	Status
3.11.3, Adhesion to Stainless Steel, Cycling Resistance, 5X, Flat 16 hrs @ 38°C / 95% RH 4 hrs @ -29°C 4 hrs @ 82°C		No Adhesion Failure	Good, Stable, No lifting or Adhesion Loss	Pass
SECTION: 3.12 Liner Release	ASTM D1000	Specification	Results	Status
3.12 Initial Room Temp		11 N / m	8.2	Pass

CERTIFIED BY:

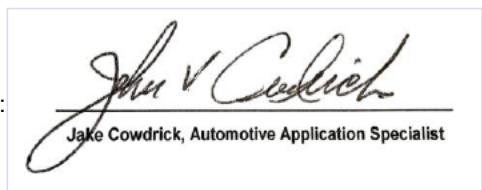

Jake Cowdrick, Automotive Application Specialist

ISSUE DATE: 1-1-25

Materials tested to OEM requirements @ 72°F +/- 2°F and 50% RH +/- 5%. Test uncertainty and minor exclusions are available online or upon request.

This certificate or report shall not be reproduced except in full, without the written approval of the Avery Dennison Performance Tapes.

Status opinion based upon measurements obtained by personnel with appropriate training and professional experience.

This laboratory is not accredited for the calibrations or tests marked *.