


Application bulletin

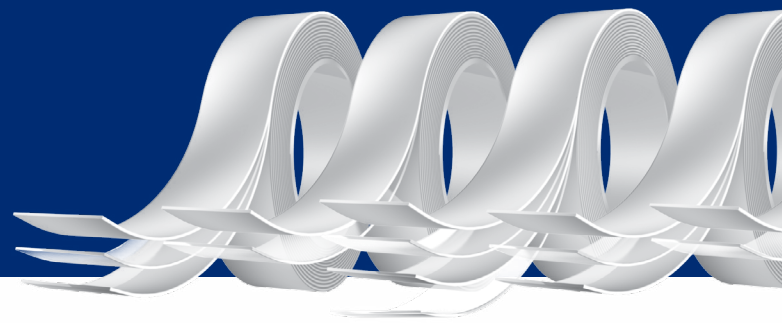

Box closure tapes

Double coated PET tapes featuring an aggressive rubber-based adhesive on both sides engineered to bond to a wide variety of poly bags and cardboard materials with varying degrees of recycled content.

Features

- Adhesive performs in temperatures between -40°F up to 170°F (-40°C up to 77°C)
- Custom liner with one color imprinting for brand identification
- Polyester carrier cuts easily for processing during fabrication and assembly
- Densified Kraft liner removes smoothly and easily for the end user
- Year-round adhesive performance from a single tape solution
- High adhesive coat weight options for bonding to cardboard with high recycled content
- Aggressive rubber adhesive that bonds well to poly bags




Products

Product	Adhesive Coat Weight	Standard Finish*	Applications
FT 8368	3.0 mil	Full coverage	POP displays, poly mailers, general use
FT 8413	5.0 mil	Fingerlift edge	Unvarnished clay coated boxes
FT 9325	6.0 mil	Fingerlift edge	Varnished or Linerboard box
FT 8455	7.0 mil	Fingerlift edge	T-mailers, liner overhang edges

*All products are available in any finish option. Please contact your sales representative for specific order requirements.

Available finish options

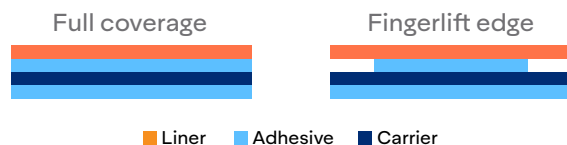

Please refer to [Tapes.AveryDennison.com](https://www.tapes.averydennison.com) for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2026 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.