

Core Series™ Portfolio Product Selection Tool

A streamlined portfolio of pressure-sensitive adhesives designed for the easy selection of a wide variety of bonding and application solutions.





ABOUT THE CORE SERIES PORTFOLIO

The Avery Dennison Core Series™ Portfolio is designed to make it easy for you to do business with Avery Dennison and your customers.

The Core Series Portfolio features the full breadth of the Avery Dennison Performance Tapes adhesive technologies—from general purpose rubber to silicone—in a variety of tape constructions. The portfolio has been developed to address a majority of your bonding needs.

CORE SERIES PORTFOLIO BENEFITS

- Instant volume-based pricing
- 24-hour standard sample (9" x 30") turnaround
- Dedicated application support call line and email address
- One-roll MOQ (based on published length)
- Four-day lead time
- No-charge slitting for 4" rolls and above, excluding products identified with **produced in full adhesive only

USING THE PRODUCT SELECTION TOOL

The Core Series Product Selection Tool is designed to streamline your adhesive/construction selection process. The tool will help walk you through the information gathering process by following four simple steps that will assist you in determining the correct adhesive for your application. The products have been color coded throughout the tool to aid you during the selection process.

In addition, we offer four differential adhesive tapes which can be identified with a line drawn through the center of the circle. This indicates the product is offered in a double-coated construction; with two different adhesives for bonding effectively to dissimilar substrates.

We invite you to use this tool whenever you have an opportunity to make an adhesive selection; we have done our best to make the tool self-serve. We also want you to be confident in your product selection, so please feel free to call your account manager or our application support line to verify your selection.

-  General Purpose Rubber
-  High Shear General Purpose Rubber
-  Low VOC Acrylic
-  High Performance Low VOC Acrylic
-  General Purpose Acrylic
-  LSE Modified Acrylic
-  High Shear Acrylic
-  High Performance Acrylic (HPA™)
-  Silicone
-  FT 8306 – General Purpose Rubber / Removable
-  FT 8327 –General Purpose Rubber / High Shear Rubber
-  FT 8392 – High Shear Acrylic / General Purpose Rubber
-  FT 9302 SF – Silicone / General Purpose Acrylic

ADHESIVE CATEGORIES

<p>GENERAL PURPOSE RUBBER</p> <p>Economical general purpose rubber adhesive. Ideal for laminating to polyester urethane and skinned foams. Bonds well to HDPE, LDPE and other low surface energy (LSE) substrates.</p> <p>Typical Applications: Foam bonding (PE, polyester urethane, EPDM, nitrile vinyl, PORON®), shoddy, security labels</p>	<p>Max service temperature: 160°F (70°C) Shear: Low Bonds well to low, medium and high surface energy materials</p>
<p>HIGH SHEAR GENERAL PURPOSE RUBBER</p> <p>High shear rubber adhesive bonds to a wide variety of substrates. Not recommended for foam bonding. Bonds well to HDPE, LDPE and other LSE substrates.</p> <p>Typical Applications: Hang tabs, security labels, plastics, POP (point-of-purchase) displays, UHMWPE</p>	<p>Max service temperature: 175°F (80°C) Shear: High Bonds well to low, medium and high surface energy materials</p>
<p>LOW VOC ACRYLIC</p> <p>Economical low VOC acrylic adhesive. Ideal for bonding to polyether urethane, polyester urethane and skinned foams.</p> <p>Typical Applications: Seat heating, foam bonding (PE, polyether and polyester urethane), speaker grills, flooring, vinyl</p>	<p>Max service temperature: 250°F (120°C) Shear: Medium Bonds well to low, medium and high surface energy materials</p>
<p>HIGH PERFORMANCE LOW VOC ACRYLIC</p> <p>High performance, low VOC acrylic adhesive. Ideal for bonding to polyester urethane, polyether urethane and skinned foams. Meets most automotive OEM requirements.</p> <p>Typical Applications: Automotive interiors (door pillar cloth, carpet fixation, insulation, arm rests), foam bonding (PE, polyether and polyester urethane), interior NVH</p>	<p>Max service temperature: 350°F (175°C) Shear: Medium Bonds well to low, medium and high surface energy materials</p>
<p>GENERAL PURPOSE ACRYLIC</p> <p>General purpose acrylic adhesive with high initial tack. Ideal for bonding to polyester urethane and skinned foams.</p> <p>Typical Applications: Foam bonding (PE, polyether and polyester urethane), heat shields, UHMWPE, thermal insulation</p>	<p>Max service temperature: 350°F (175°C) Shear: Medium Bonds well to low, medium and high surface energy materials</p>
<p>LSE MODIFIED ACRYLIC</p> <p>LSE modified acrylic adhesive that offers extremely high adhesion to textured and LSE substrates. Also offering excellent environmental resistance.</p> <p>Typical Applications: Heat shielding, painted metal, acoustical absorption, UHMW</p>	<p>Max service temperature: 350°F (175°C) Shear: Medium Bonds well to low, medium, and high surface energy materials</p>
<p>HIGH SHEAR ACRYLIC</p> <p>High shear acrylic adhesive for medium and high surface energy materials when shear resistance is a priority. Bonds well to glass, ceramic and polyether urethane foam.</p> <p>Typical Applications: Polyether urethane foam bonding, mirror bonding, ABS, automotive</p>	<p>Max service temperature: 350°F (175°C) Shear: Medium Bonds well to medium and high surface energy materials</p>
<p>HIGH PERFORMANCE ACRYLIC (HPA)</p> <p>High performance acrylic adhesive with high holding power under stress and load. Resistant to chemicals and extreme temperatures.</p> <p>Typical Applications: Graphic attachment, nameplates/dome labels, membrane switch, electrical shields, polycarbonate, veneers</p>	<p>Max service temperature: 400°F (205°C) Shear: High Bonds well to medium and high surface energy materials</p>
<p>SILICONE</p> <p>Silicone adhesive is used on FT 9302 SF for extra low surface energy bonding. Ideal for silicone-based or Teflon™ (PTFE) substrates.</p> <p>Typical Applications: Silicone rubber gasketing, Teflon™ film lamination</p>	<p>Max service temperature: 400°F (205°C) Shear: High Bonds well to extra-low, low, medium, and high surface energy materials</p>

○ = Removable adhesives for temporary bonding

DIFFERENTIAL ADHESIVE PRODUCTS

Designed for bonding dissimilar materials, these products feature different adhesive systems on the unwind and liner side.

FT 8306 – GENERAL PURPOSE RUBBER / REMOVABLE



Differential tape with permanent rubber adhesive on the unwind side (ideal for bonding to foams, LDPE and HDPE) and removable acrylic adhesive on the liner side.

Typical Applications: Polishing pads, recloseable bags, core starting, POP (point-of-purchase) displays, mounting promotional items, removable/changeable foam gaskets

Max service temperature: 175°F (80°C)

Shear: Medium

Removable

FT 8327 – GENERAL PURPOSE RUBBER / HIGH SHEAR RUBBER



Differential tape with general purpose rubber adhesive on the unwind side and a high shear rubber adhesive on the liner side. Bonds to a wide range of substrates, including most foams.

Typical Applications: Foam bonding for open cell PE, polyester urethane

Max service temperature: 175°F (80°C)

Shear: Medium

Bonds well to low, medium and high surface energy materials

FT 8392 – HIGH SHEAR ACRYLIC / GENERAL PURPOSE RUBBER



Differential tape with acrylic adhesive on the unwind side and a high shear and adhesion rubber adhesive on the liner side. Ideal for polyester urethane, polyether urethane and low perm foams.

Typical Applications: Foam bonding for open cell PE, polyether urethane and polyester urethane

Max service temperature: 175°F (80°C)

Shear: High

Bonds well to low, medium and high surface energy materials

FT 9302 SF – SILICONE / GENERAL PURPOSE ACRYLIC



Differential tape with a silicone adhesive on the unwind side and a general purpose acrylic on the liner side. Features a double liner system. Designed for applications requiring good adhesion to hard-to-bond-to LSE materials.

Typical Applications: Bonding to silicone sponge and silicone coated surfaces.

Max service temperature: 350°F (175°C)

Shear: Medium

Bonds well to low, medium and high surface energy materials



CHOOSING A CORE SERIES ADHESIVE

First, gather the following information:

1. What type of material will you be laminating to:

- Polyether Urethane
- Polyester Urethane
- Dense Urethane (Poron®, HyPUR-cel®, Norseal®)
- Sponge Rubber Foam (EPDM, Nitrile, Vinyl, Neoprene)
- Silicone Sponge Foam
- Nonwovens, felts and fabrics
- High or medium surface energy films or foils
- Low surface energy films or foils

2. The surface energy of the substrate your customer is adhering to:

High: Aluminum, Stainless Steel, Copper, Glass, Polyimide (Kapton®), Nylon, Polyester (PET) Film, Polyurethane Film

Medium: ABS, Polycarbonate, Vinyl (PVC), Acrylic, Polystyrene

Low: EVA, Powder Coated Paint, Polyethylene, Polypropylene, PVF

Extra low: PTFE (Teflon™), Silicone

3. Are there any other end use application requirements?

- Temperature Resistance
- Humidity Resistance
- Solvent/Chemical Resistance
- UV Resistance
- Shear
- Tack
- Cost
- OEM Specifications (learn more about our OEM specified products at tapes.averydennison.com/oemcertfinder)

4. What tape construction is needed?

- Transfer Tape - Single Liner/Double Liner
- Single Coated Tape
- Double Coated Tape/Differential

Once you have gathered the information; you are then ready to chose a Core Series product for your application.

CHOOSING A CORE SERIES ADHESIVE


STEP 1: What material will you be laminating to?

Our Core Series offers adhesive chemistries for a wide range of common lamination materials, including foams, fibrous, and films. Use this chart to see which adhesives are compatible with your material.

LAMINATION SELECTION GUIDE

Adhesive Types	FOAMS					FIBROUS	FILMS & FOILS (Refer to Surface Energy Chart)	
	Polyether Urethane	Polyester Urethane	Dense Urethane (Poron®, HyPUR-cel®, Norseal®)	Sponge Rubber Foams (EPDM, PVC, Nitrile Vinyl, Neoprene)	Silicone Sponge Foam	Nonwoven, Felts and Fabrics	High & Medium Surface Energy	Low Surface Energy
General Purpose Rubber	○	●	●	●	○	●	●	●
High Shear General Purpose Rubber	○	○	○	○	○	●	●	●
Low VOC Acrylic	●	●	●	●	○	●	●	●
High Performance Low VOC Acrylic	●	●	●	●	○	●	●	●
General Purpose Acrylic	◐	●	●	●	○	●	●	●
LSE Modified Acrylic	●	●	●	●	○	●	●	●
High Shear Acrylic	●	●	●	○	○	●	●	○
High Performance Acrylic (HPA)	○	○	○	◐	○	●	●	○
Silicone	○	○	○/○	○	●	○	◐	◐

○ Low ◐ Medium ● High

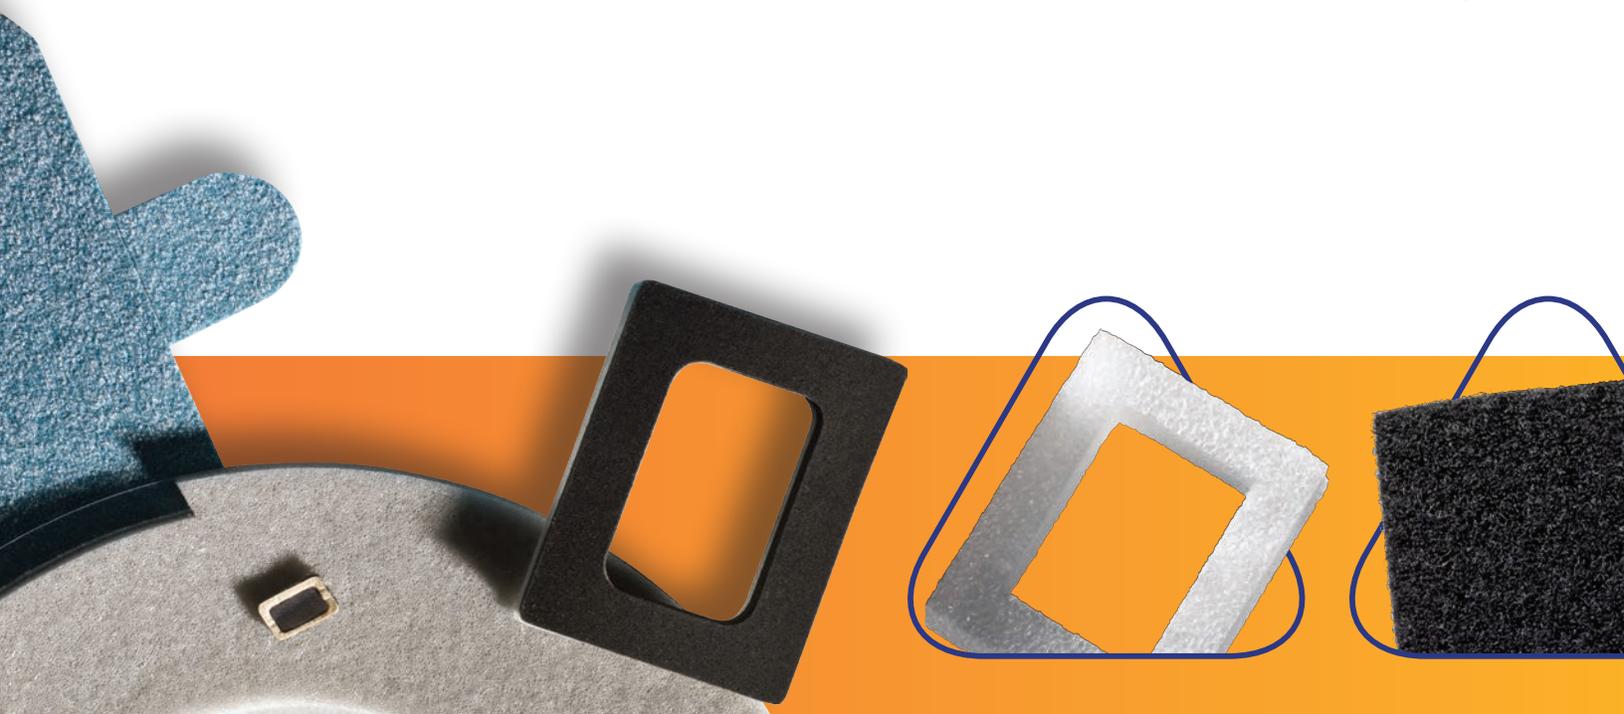

STEP 2: What is the surface energy of the substrate your laminated part will be bonded to?

Low and extra-low surface energy substrates provide a bonding challenge for some adhesives. Use the chart below to determine which adhesive families are most suitable for bonding your laminated part. **Note:** Keep in mind which families were also suitable in Step 1.

SURFACE ENERGY SELECTION GUIDE

Adhesive Types	HIGH							MEDIUM					LOW				X-LOW				
	Aluminum	Stainless Steel	Copper	Glass	Polyimide (Kapton®)	Nylon	Polyester (PET)	Polyurethane (PU) Film	ABS	Polycarbonate (PC)	Vinyl (PVC)	Acrylic	Polystyrene	EVA	Powder Coated Paints	Polyethylene (PE, UHMW)	Polypropylene (PP)	PVF (Tedlar)	Unknown Substrate	PTFE (Teflon™)	Silicone
● General Purpose Rubber				●						●					●						○
● High Shear General Purpose Rubber				●						●					●						○
● Low VOC Acrylic				●						●					●						○
● High Performance Low VOC Acrylic				●						●					●						○
● General Purpose Acrylic				●						●					●						○
● LSE Modified Acrylic				●						●					●						○
● High Shear Acrylic				●						●					○						○
● High Performance Acrylic (HPA)				●						●					○						○
● Silicone (FT 9302 SF)				●						●					●						●

○ Low ● Medium ● High



STEP 3: Are there additional end use application requirements?

End use requirements—such as exposure to temperature extremes or chemicals—should be considered when choosing an adhesive. Use the chart below to determine which adhesive families are most suitable for other application requirements. **Note:** Keep in mind the adhesive families that were also suitable in Steps 1 and 2.

APPLICATION REQUIREMENTS GUIDE

Adhesive Chemistries	Maximum Service Temperature	Humidity Resistance	Solvent / Chemical Resistance	UV Resistance	Shear	Tack	Price
● General Purpose Rubber	160F (70C)	○	○	○	○	●	\$
● High Shear General Purpose Rubber	175F (80C)	○	○	○	●	●	\$
● Low VOC Acrylic	250F (120C)	◐	◐	◐	◐	◐	\$
● High Performance Low VOC Acrylic	350F (175C)	◐	◐	◐	◐	◐	\$\$
● General Purpose Acrylic	350F (175C)	●	◐	◐	◐	●	\$\$
● LSE Modified Acrylic	350F (175C)	◐	◐	◐	◐	●	\$\$\$
● High Shear Acrylic	350F (175C)	●	●	●	●	○	\$\$
● High Performance Acrylic (HPA)	400F (205C)	●	●	●	●	○	\$\$\$
● Silicone (FT 9302 SF)	400F (205C)	●	●	●	●	○	\$\$\$

○ Low ◐ Medium ● High



STEP 4: What construction is needed for your process?


Review the following liner options, then proceed to pages 13 and 14 to determine which Core Series product best meets your application needs.

LINER ATTRIBUTES


Liner Type	Tensile Strength	Tear Resistance	Conformability	Humidity Resistance	Rotary Die Cutting	Kiss Cutting	Water Jet
Paper/Kraft (SCK)	○	○	○	○	●	●	○
Poly Coated Kraft (PCK)	◐	◐	◐	◐	○	◐	◐
12 Pt. Board	◐	◐	○	◐	○	◐	◐
Polypropylene (PP)	◐	●	●	●	◐	○	●
Polyester (PET)	●	○	◐	●	◐	●	●

○ Low ◐ Medium ● High


CONSTRUCTIONS

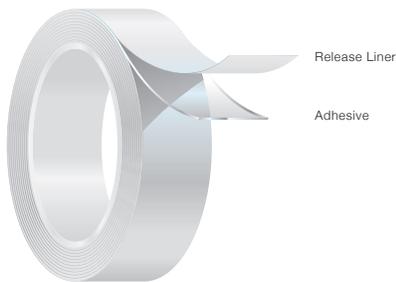


Single Liner Transfer Tape

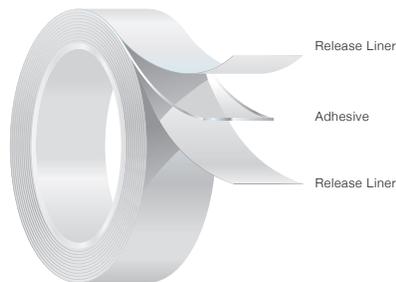


Double Liner Transfer Tape

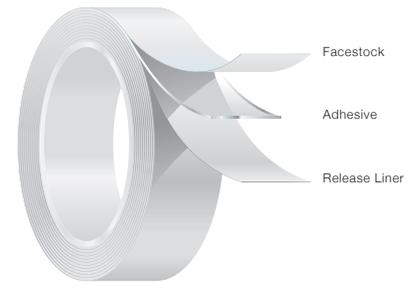



Single Coated Tape

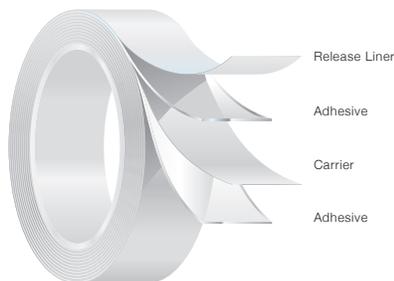

Double Coated Tape

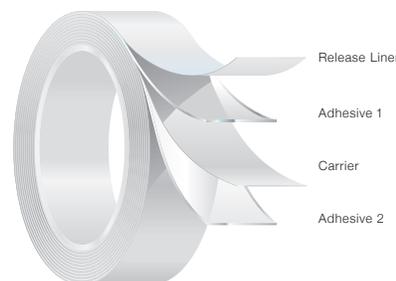

Differential Tape

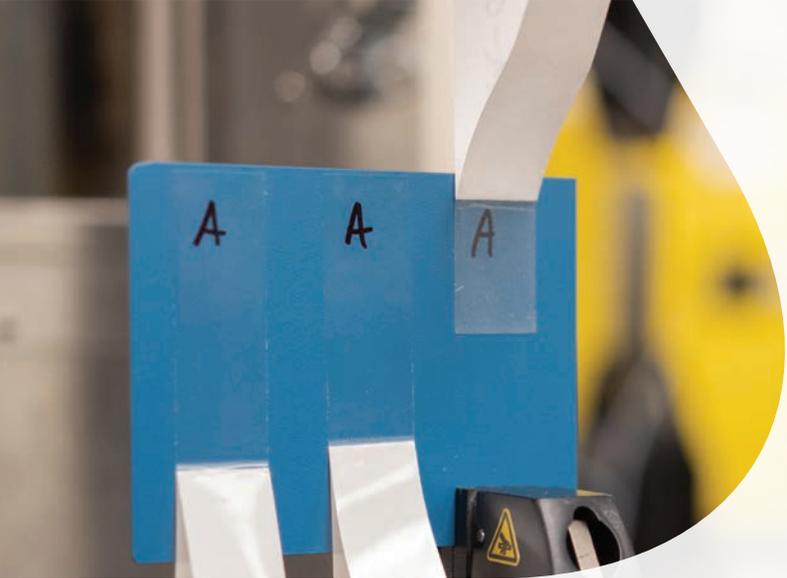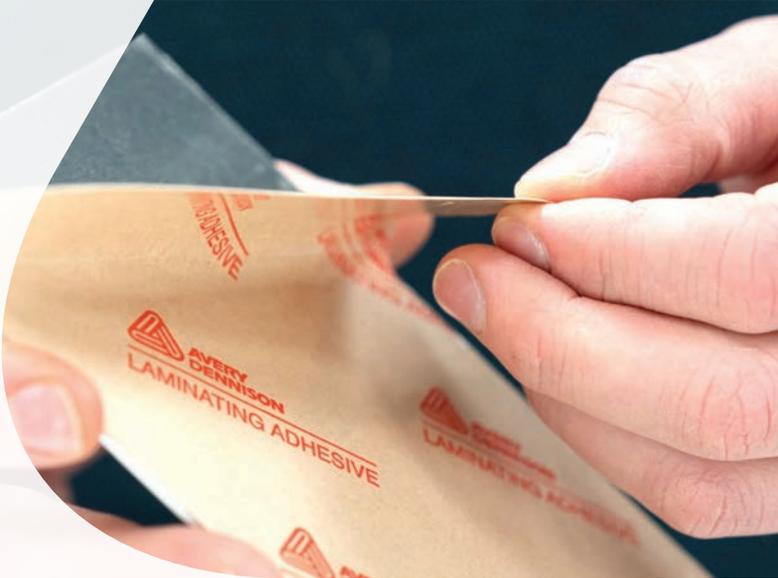

Finally, once you've made an adhesive choice, refer to these tables for additional product and ordering information.

GENERAL PURPOSE

Adhesive Type	Product	Construction	Liner Options	ORDERING INFORMATION				THICKNESS (MILS)					
				Spec #	MOQ	Width " x Length'	Lead Time	Unwind Side	Carrier	Liner Side	Liner	Total Thickness (without Liner)	Total Thickness
General Purpose Rubber	FBR 1950**	Transfer Tape	80# White Kraft	57512	1 Roll	54" x 540'	4 Day	-	-	1.5	4.4	1.5	5.9
			Natural 12 Pt. Board	57513	1 Roll	54" x 540'	4 Day	-	-	1.5	12.5	1.5	14.0
	FBR 8950	Double Coated PET	80# White Kraft	57514	1 Roll	54" x 750'	4 Day	2.1	0.5	1.4	4.4	4.0	8.4
			Natural 12 Pt. Board	57515	1 Roll	54" x 750'	4 Day	2.1	0.5	1.4	12.5	4.0	16.5
High Shear General Purpose Rubber	FT 8345	Double Coated PET	60# White Kraft	58054	1 Roll	54" x 750'	4 Day	2.4	0.5	2.4	3.5	5.3	8.8
Low VOC Acrylic	FT 2018X**	Transfer Tape	55# White Kraft	57881	1 Roll	60" x 540'	4 Day	-	-	3.2	3.2	3.2	6.4
	FT 7770X	Double Coated Tissue	55# White Kraft	57878	1 Roll	60" x 750'	4 Day	1.7	2.2	2.3	3.2	6.2	9.4
	FT 7951X	Double Coated Scrim	55# White Kraft	57879	1 Roll	60" x 750'	4 Day	1.9	-	1.9	3.2	3.8	7.0
	FT 7329X	Double Coated PET	55# White Kraft	57880	1 Roll	60" x 750'	4 Day	1.3	0.5	1.9	3.2	3.7	6.9
High Performance Low VOC Acrylic	FT 8270	Double Coated Tissue	87# White Poly Coated Kraft	57564	1 Roll	54" x 750'	4 Day	2.4	2.2	2.4	6.8	7.0	13.8
	FT 1149X**	Transfer Tape	82# Natural Poly Coated Kraft	57551	1 Roll	54" x 540'	4 Day	-	-	5.0	5.8	5.0	10.8
			Natural 12 Pt. Board	57553	1 Roll	54" x 540'	4 Day	-	-	5.0	12.5	5.0	17.5
General Purpose Acrylic	FT 1123**	Transfer Tape	80# White Kraft	56084	1 Roll	54" x 540'	4 Day	-	-	3.3	4.4	3.3	7.7
	FT 1126**	Transfer Tape	80# White Kraft	56091	1 Roll	54" x 540'	4 Day	-	-	5.2	4.4	5.2	9.6
			Natural 12 Pt. Board	57415	1 Roll	54" x 540'	4 Day	-	-	5.5	12.5	5.5	18.0
	FBA 8960	Double Coated PET	80# White Kraft	57533	1 Roll	54" x 750'	4 Day	2.1	0.5	1.4	4.4	4.0	8.4
			Natural 12 Pt. Board	57534	1 Roll	54" x 750'	4 Day	2.1	0.5	1.4	12.5	4.0	16.5
LSE Modified Acrylic	FT 1943 PP	Transfer Tape	4.0 mil White Polypropylene	57682	1 Roll	60" x 540'	4 Day	-	-	4	4	4	8
	FT 3043	Double Liner / Transfer Tape	2.0 mil Clear PET / 60# White Kraft	56822	1 Roll	60" x 540'	4 Day	-	-	4	2.0 / 3.6	4	6.0 / 7.6
High Performance Acrylic (HPA)	HPA 1902	Transfer Tape	84# Natural Poly Coated Kraft (Printed)	57492	1 Roll	54" x 540'	4 Day	-	-	2.4	5.6	2.4	8.0
			2.0 mil Clear PET	57412	1 Roll	54" x 540'	4 Day	-	-	2.4	2.0	2.4	4.4
	HPA 1905	Transfer Tape	84# Natural Poly Coated Kraft (Printed)	57493	1 Roll	54" x 540'	4 Day	-	-	4.9	5.6	4.9	10.5
			2.0 mil Clear PET	57413	1 Roll	54" x 540'	4 Day	-	-	4.9	2.0	4.9	6.9
	HPA 9392	Double Coated PET	61# Natural Poly Coated Kraft (Printed)	57723	1 Roll	54" x 750'	4 Day	1.0	0.5	1.0	4.3	2.5	6.8

** Produced in full adhesive width only

*** Products listed in blue: Approved under Title 21 Federal Code of Regulations Part 175- Indirect Food Additives: Adhesives and Components of Coatings

 Recognized Component

SPECIALTY PRODUCTS

DIFFERENTIAL PRODUCTS

				ORDERING INFORMATION				THICKNESS (MILS)					
Adhesive Type	Product	Construction	Liner Options	Spec #	MOQ	Width " x Length '	Lead Time	Unwind Side	Carrier	Liner Side	Liner	Total Thickness (without Liner)	Total Thickness
 General Purpose Rubber / Removable	FT 8306	Double Coated PET	60# White Kraft	87184	1 Roll	54" x 750'	4 Day	2.3	0.5	0.8	3.5	3.6	7.1
 General Purpose Rubber / High Shear Rubber	FT 8327	Double Coated PET	80# White Kraft	56099	1 Roll	54" x 750'	4 Day	2.3	0.5	1.8	4.4	4.6	9.0
			Natural 12 Pt. Board	57419	1 Roll	54" x 750'	4 Day	2.3	0.5	1.8	12.5	4.6	17.1
 High Shear Acrylic / General Purpose Rubber	FT 8392	Double Coated PET	80# White Kraft	56631	1 Roll	54" x 750'	4 Day	1.6	0.5	1.5	4.4	3.6	8.0
			Natural 12 Pt. Board	57418	1 Roll	54" x 750'	4 Day	1.6	0.5	1.5	12.5	3.6	16.1
 Silicone / General Purpose Acrylic	FT 9302 SF	Double Coated PET	2.0 mil Clear PET / 84# Natural Poly Coated Kraft	57477	1 Roll	54" x 750'	4 Day	2.5	0.9	2.3	5.6	5.7	11.3

DOUBLE COATED FOAM*

				ORDERING INFORMATION				THICKNESS (MILS)					
 High Shear General Purpose Rubber	FM 2108	1/8" White Foam	60# White Kraft	55946	1 Roll	60" x 216'	4 Day	2.5	125	2.5	3.5	130.0	133.5
	FM 2116	1/16" White Foam	60# White Kraft	55904	1 Roll	54" x 324'	4 Day	2.5	63	2.5	3.5	68.0	71.5
	FM 2132	1/32" White Foam	60# White Kraft	55913	1 Roll	54" x 648'	4 Day	2.5	31	2.5	3.5	36.0	39.5
 General Purpose Acrylic	FM 2316	1/16" White Foam	60# White Kraft	56078	1 Roll	54" x 324'	4 Day	2.3	63	2.3	3.5	67.6	71.1
	FM 2333	1/32" White Foam	60# White Kraft	56288	1 Roll	54" x 648'	4 Day	2.3	31	2.3	3.5	35.6	39.1
 High Shear Acrylic	FM 2454	1/32" Black Foam	60# White Kraft	56742	1 Roll	54" x 648'	4 Day	2.1	31	2.1	3.5	35.2	38.7

* Double coated foams have a maximum service temp of 180° F

SINGLE COATED FOILS

				ORDERING INFORMATION				THICKNESS (MILS)					
 General Purpose Rubber	FL 1002	1.9 mil Foil	60# White Kraft	56831	1 Roll	60" x 750'	4 Day	-	1.9 mil Foil	1.8	3.2	3.7	6.9
 General Purpose Acrylic	FL 1008	1.9 mil Foil	60# White Kraft	57432	1 Roll	60" x 750'	4 Day	-	1.9 mil Foil	1.5	3.2	3.4	6.6
 High Performance Acrylic (HPA)	FL 1000	1.9 mil Foil	60# White Kraft	56830	1 Roll	60" x 750'	4 Day	-	1.9 mil Foil	2.4	3.2	4.3	7.5
	FL 1007	3.0 mil Foil	60# White Kraft	58684	1 Roll	47" x 750'	4 Day	-	3 mil Foil	1.0	3.5	4.0	7.5

SINGLE COATED FLOCK

				ORDERING INFORMATION				THICKNESS (MILS)					
 High Performance Low VOC Acrylic	FT 0900X	Single Coated Black Flock	82# Natural Poly Coated Kraft	57565	1 Roll	54" x 240'	4 Day	-	31	4.8	5.8	35.8	41.6
			Natural 12 Pt. Board	57567	1 Roll	54" x 240'	4 Day	-	31	4.8	12.5	35.8	48.3
			2.0 mil Clear PET	57566	1 Roll	54" x 240'	4 Day	-	31	4.8	2.0	35.8	37.8

ABOUT AVERY DENNISON

Avery Dennison Corporation (NYSE: AVY) is a global materials science and manufacturing company specializing in the design and manufacture of a wide variety of labeling and functional materials. The company's products, which are used in nearly every major industry, include pressure-sensitive materials for labels and graphic applications; tapes and other bonding solutions for industrial, medical and retail applications; tags, labels and embellishments for apparel; and radio-frequency identification (RFID) solutions serving retail apparel and other markets. Headquartered in Glendale, California, the company employs approximately 30,000 employees in more than 50 countries. Reported sales in 2018 were \$7.2 billion. Learn more at www.averydennison.com.

ABOUT AVERY DENNISON PERFORMANCE TAPES

Avery Dennison Performance Tapes is a world-class operation focused on developing and manufacturing high performance pressure-sensitive adhesives and tapes for a broad range of applications in automotive, appliances, electronics, building and construction, specialty industrial and personal care segments. The organization has 50 years of experience supplying standard and customized pressure-sensitive materials designed to deliver innovative solutions for customers' needs across the globe. Worldwide manufacturing facilities ensure a global presence supported by local sales, technical and customer service throughout the regions. Learn more at www.tapes.averydennison.com.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2019 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners.

ADV# 0166, 10/19, 1000



Performance
Tapes

Asia Pacific

Kunshan, China,
No. 618 Nanhe Road
Kunshan Economic & Technological Zone
China 215335
Phone: +86 400 6987 555
Fax: +86 512 57155059

Europe

Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

North America

250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469

For more information on our bonding tapes and adhesive solutions,
visit Tapes.AveryDennison.com