



FT 1123 PET


FT 1123 PET is designed for applications requiring an acrylic adhesive for laminating to polyether and polyester urethane foams where high initial tack and adhesion are required

FEATURES:

- High tack acrylic adhesive
- Superior die cutting properties
- Moisture stable polyester liner

BENEFITS:

- Excellent initial tack and adhesion
- Adheres to a wide variety of substrates
- Excellent foam bonding characteristics

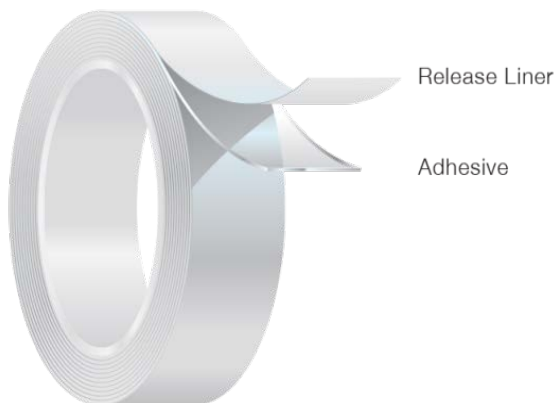

CONSTRUCTION:

Liner:

Polyester

Adhesive:

Modified Acrylic

FT 1123 PET

Adhesive Properties:		Typical Values		
Thickness	Test Method(s): PSTC-133	US MILS	MM's	Microns (µm)
Liner:		2.0	0.05	51
Adhesive:		3.0	0.08	76
Total Caliper:		5.0	0.13	127

PEEL ADHESION		Test Method(s): PSTC-101, ASTM D-3330, STD-10		
2 mil PET 180° 12" min				
Substrate		Lbf / In	US Oz / In	N / Meter
SS	Initial	7.8	125	1366
ABS	Initial	8.3	133	1453
PP	Initial	5.7	91	998
Talc PP	Initial	3.1	50	543
LDPE	Initial	3.8	61	665
HDPE	Initial	8.3	133	1453
TPO	Initial	4.1	66	718
Painted Metal	Initial	4.6	73	800

LOOP TACK		Test Method(s): PSTC-16, STD-7		
2 mil PET 20" min				
Substrate		Lbf / In		
SS	Initial	7.3		

STATIC SHEAR		Test Method(s): PSTC-16, STD-7		
2 mil PET 1" sq (6.5 cm2) 2.2 lbs (1 kg)				
Substrate		Min to Fail		
SS	Initial	> 400		

SAFT		Test Method(s): ASTM D 3654, STD-243		
Aluminum Foil 1" sq (6.5 cm2) 1000 g				
Substrate		Min to Fail	Fail Temp °F	Fail Temp °C
SS		104	156	69

TEMPERATURES	° F	° C
Minimum Service Temperature	-40 ° F	-40 ° C
Maximum Service Temperature	350 ° F	176 ° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- One year when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2017 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469