



FM 7680I


Avery Dennison FM 7680I is a black PE foam tape designed for hi-end mounting applications in smart devices and electronics such as mobile phone assembly window/lens bonding. FM 7680I is suitable for industrial applications where high temperature, UV resistance, good moisture resistance and dimensional stability are required. The thin tape caliper is ideal for thinner designs.

FEATURES:

- Clear modified acrylic adhesive
- Closed cell PE foam carrier
- 300um tape thickness

BENEFITS:

- High adhesion on a variety of substrates, including low surface energy substrates, like PE
- Excellent cohesion provides high dynamic shear and push out force
- High temperature and UV resistance
- Waterproof with IPX7 certification
- Good moisture resistance and dimensional stability
- Thin caliper of the tape makes it suitable for thinner design concepts

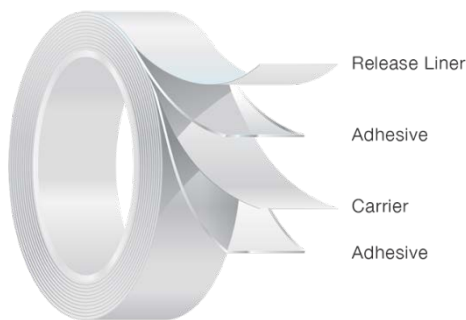

CONSTRUCTION:

Adhesive:

Modified acrylic adhesive

Carrier:

200 micron Closed cell PE foam carrier

Liner:

110 micron white PE Coated Kraft

With red "Avery Dennison" Logo imprinted

FM 7680I

Adhesive Properties	Typical Values	
THICKNESS		
Adhesive + Carrier	300 microns	
Liner	110 microns	
Total	410 microns	
*ATM.7		
Loop Tack (STD-QA-524)	52 N/25mm	
Dynamic Shear (STD-QA-518)	810 N/inch ²	
*ATM.1 - PSTC.1		
Adhesion (180° peel) N/25mm	20 min	24 hrs
Stainless Steel	20	23
*ATM.2 - FINAT.8 - PSTC.7		
SHEAR RESISTANCE		
(static - 625mm ² x 2.5 kg)	>10.000 min	
*ATM.2 - FINAT.8 - PSTC.7		
TEMPERATURES		
Application (minimum)	+10°C	
Service (continuous)	-40°C to +100°C	
Short term	+120°C	

Note: The listed values are typical only and not intended to serve as product specifications

APPLICATION TECHNIQUES

- It is essential with all pressure-sensitive tapes the application surface is clean, dry and free of grease and oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (surface energy) surface achieves different performance

STORAGE AND SHELF LIFE

The shelf life of the product is one year when stored at 18-22°C / 64-72°F, 30-70% relative humidity and out of direct sunlight, in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2014 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

South America
Rua Francisco Foga, 225
13280-000 Vinhedo
SP Brazil
Phone: +55 19 3876 7736
Fax: +55 19 3876 7682

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469

For more information on our bonding tapes and adhesive solutions, visit Tapes.AveryDennison.com