



FT 0900X


Avery Dennison FT 0900X is a 36 mil single coated black flock with a high performance low VOC acrylic adhesive. The adhesive bonds very well to low surface energy materials and the flock provides anti-squeak properties with high wear resistance. FT 0900X is commonly used in automotive applications and where low VOC properties are required.

FEATURES:

- Single coated tape construction
- Low outgassing high performance modified acrylic adhesive
- Nylon flock facestock
- Poly coated kraft release liner

BENEFITS:

- Functional tape that allows for die cutting
- Solvent free adhesive with good adhesion to low surface energy materials
- Good heat resistance
- High abrasion resistance and NVH reduction
- Good moisture stability and lay flat properties

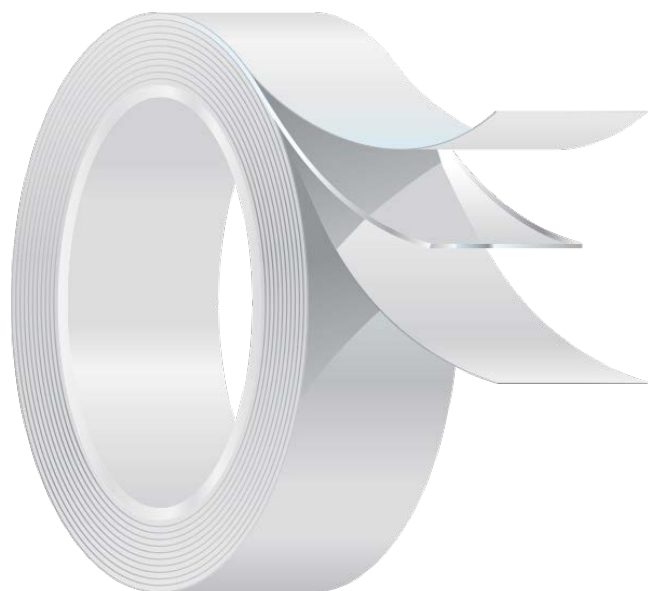

CONSTRUCTION:

Liner:

82# Natural Poly Coated Kraft

Adhesive:

Low VOC Acrylic

Carrier:

Flock

FT 0900X

Adhesive Properties:		Typical Values		
Thickness	ASTM D-3652	US mil	mm	micron (µm)
Liner		5.8	0.15	145
Adhesive		4.8	0.12	120
Carrier		31.0	0.79	785
Total Caliper without Liner:		35.8	0.91	905
Total Caliper:		41.6	1.06	1050

PEEL ADHESION				Test Method(s): PSTC-101, ASTM D-3330		
2 mil PET 72 hr dwell 180° 12 in /min (305 mm / min)						
Substrate		Lbf / In		N / Meter		
SS		9.0		1,580		
ABS		10.0		1,750		

LOOP TACK				Test Method(s): PSTC-16		
2 mil PET 20 in / min (508 mm / min)						
Substrate		Lbf / In		N / Meter		
SS		3.5		610		

STATIC SHEAR				Test Method(s): PSTC-107, ASTM D 3654		
2 mil PET 72 hr dwell 1" sq (6.5 cm2) 500 g						
Substrate		Mins to Fail				
SS		> 10,000				

TEMPERATURES		° F	° C
Minimum Application Temperature		50° F	10° C
Minimum Service Temperature		-40° F	-40° C
Maximum Service Temperature		350° F	175° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- One year when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2018 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469