




FT 2150

FEATURES:

- UV cured pure acrylic adhesive
- White easy release glassine liner

BENEFITS:

- Optimum initial adhesion levels on substrates such as foams and fibers
- Offers high temperature performance and chemical resistance
- Eco-friendly manufacturing process without emissions
- Low fogging characteristic, ideal for interior applications
- Facilitates visual quality control of the end product
- Offers easy removal at point of application

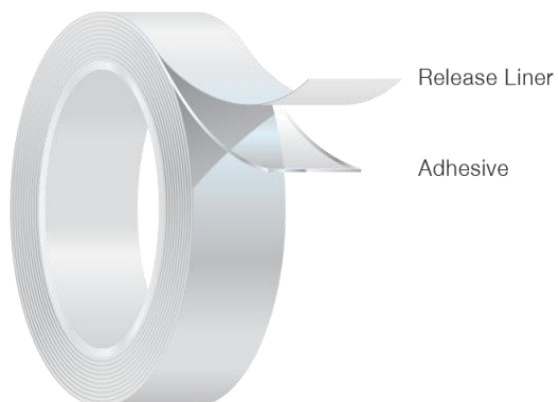

CONSTRUCTION:

Liner:

White Glassine

Adhesive:

Acrylic

FT 2150

Adhesive Properties:		Typical Values		
Thickness	Test Method(s): PSTC-133	US Mils	MM's	Microns (µm)
Liner:		3.4	0.09	85
Adhesive:		2.3	0.06	58
Total Caliper:		5.7	0.14	#VALUE!

PEEL ADHESION		Test Method(s): PSTC-101, ASTM D-3330, STD-10		
2 mil PET 180° 12" min				
Substrate		Lbf / In	US Oz / In	N / Meter
SS	20 min dwell	4.5	72	783
	24 hr dwell	5.6	90	981
Polycarbonate	20 min dwell	6.1	98	1072
	24 hr dwell	6.1	98	1068
Painted Steel	20 min dwell	5.9	94	1030
	24 hr dwell	6.0	96	1054
Polypropylene	20 min dwell	2.0	32	350
	24 hr dwell	2.4	39	424

LOOP TACK		Test Method(s): PSTC-16, STD-7		
2 mil PET 180° 20" min				
Substrate		Lbf / In	US Oz / In	N / Meter
SS	Initial	6.3	100	1098

STATIC SHEAR		Test Method(s): PSTC-107, ASTM D 3654, STD-9		
2 mil PET 1" sq (6.5 cm2) 1000 g				
Substrate		Min to Fail		
SS	Initial	> 3,500		

TEMPERATURES		° F	° C
Min Application Temp		50 ° F	10 ° C
Max Continuous Operating Temp		248 ° F	120 ° C
Max Intermittent Operating Temp		284 ° F	140 ° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- Two years when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2015 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469