



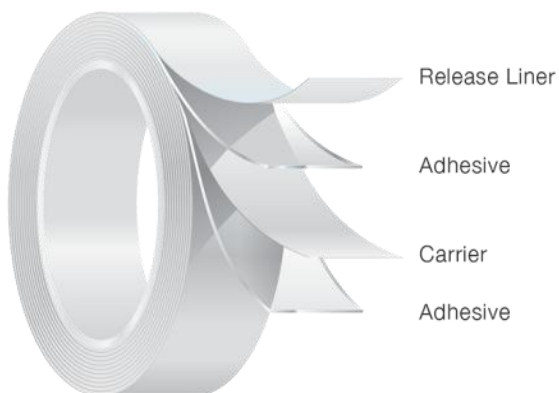
FT 7369

FEATURES:

- Modified clear acrylic adhesive
- Remoisturised liner
- Black polyester carrier

BENEFITS:

- Offers high temperature and UV resistance
- Good adhesion to a lot of surfaces, also low energy surfaces
- Good moisture and dimensional stability
- Very good conversion characteristics
- Blocks light, offers detection through converting

**CONSTRUCTION:****Liner:**

Yellow Glassine

Adhesive 1 Liner:

Acrylic

Carrier:

Black Polyester

Adhesive 2 Uwind:

Acrylic

FT 7369

Adhesive Properties:			Typical Values		
Thickness		Test Method(s): PSTC-133		US Mils	MM's
Liner:				2.9	0.07
Carrier and Adhesives:				7.9	0.20
Total Caliper:				10.8	0.27
PEEL ADHESION			Test Method(s): PSTC-101, ASTM D-3330, STD-10		
2 mil PET	180°	12" min			
Substrate			Lbf / In	US Oz / In	N / Meter
SS	Liner	20 min dwell	5.4	87	949
		24 hr dwell	6.3	100	1100
Polypropylene	Liner	20 min dwell	5.0	80	879
		24 hr dwell	5.5	88	960
TENSILE			Test Method(s): PSTC-131, ASTM D-882, STD-3A,B,C		
Product	180°				
Substrate			Lbf / In	US Oz / In	N / Meter
Product	Liner		8.6	137	1501
ELONGATION			Test Method(s): PSTC-131, ASTM D-882, STD-3A,B,C		
Product	180°				
Substrate			%		
Product	Liner		40		
LOOP TACK			Test Method(s): PSTC-16, STD-7		
2 mil PET	180°	20" / min			
Substrate			Lbf / In	US Oz / In	N / Meter
SS	Liner	Initial	10.3	164	1800
STATIC SHEAR			Test Method(s): PSTC-107, ASTM D 3654, STD-9		
2 mil PET	1" sq (6.5 cm2)	1000 g			
Substrate			Min to Fail		
SS	Liner		> 6,000		
TEMPERATURES			° F		° C
Min Application Temp			50 ° F		10 ° C
Max Continuous Operating Temp			212 ° F		100 ° C
Max Intermittent Operating Temp			248 ° F		120 ° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- Two years when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2013 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. Avery™ and all other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

South America
Rua Francisco Foga, 225
13280-000 Vinhedo
SP Brazil
Phone: +55 19 3876 7736
Fax: +55 19 3876 7682

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469