



FASSON® 0827


Suitable for die-cut shapes, shielding, moisture and vapor barrier sealing components or lamination to insulation materials.

FEATURES:

- High-strength reinforced 6.5 mil FSK facestock
- Quick stick, cold-temperature rubber adhesive
- Exceptional cold environment adhesion

BENEFITS:

- Strong bond to a variety of substrates
- Tri-directional FSK reinforces seal
- Tested in accordance with UL 723
- Made in the USA

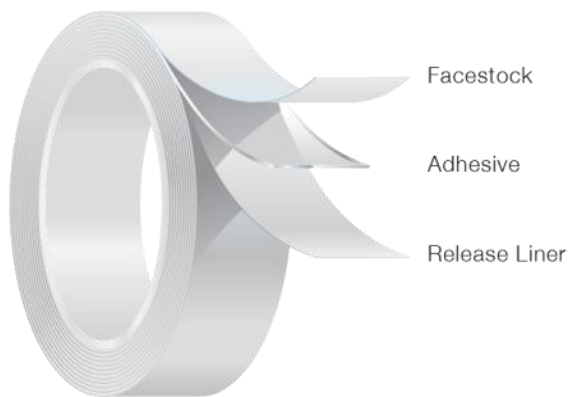

CONSTRUCTION:

Carrier:

Foil Laminate

Adhesive:

Rubber

Liner:

Densified Kraft



General Use Tape Surface Burning Characteristics to

UL 723	Flame Spread	10
	Smoke Developed	15
		722S

FASSON® 0827

Adhesive Properties:		Typical Values		
Thickness	Test Method(s): PSTC-133	US Mils	MM's	Microns (µm)
Liner:		3.2	0.08	81
Adhesive:		2.0	0.05	51
Carrier:		8.0	0.20	203
Total Caliper:		13.2	0.34	335

PEEL ADHESION		Test Method(s): PSTC-101, ASTM D-3330, STD-10		
Product 180° 12" min				
Substrate		Lbf / In	US Oz / In	N / Meter
SS	Initial	5.0	80	876

LOOP TACK		Test Method(s): PSTC-16, STD-7		
Product 180° 20" / min				
Substrate		Lbf / In	US Oz / In	N / Meter
SS	Initial	12.0	192	2101

TENSILE		Test Method(s): PSTC-131, ASTM D-882, STD-3A,B,C		
Product				
Substrate		Lbf / In	US Oz / In	N / Meter
Product	MD	40.0	640	7004
	CD	25.0	400	4378

ELONGATION		Test Method(s): PSTC-131, ASTM D-882, STD-3A,B,C		
Product				
Substrate		%		
Product	MD	1		
	CD	1		

STATIC SHEAR		Test Method(s): PSTC-107, ASTM D 3654, STD-9		
Product 1" sq (6.5 cm2) 2.2 lb (1.0 kg)				
Substrate		Min to Fail		
SS	Initial	> 10,000		

TEMPERATURES		° F	° C
Min Application Temp		10 ° F	-12 ° C
Max Continuous Operating Temp		120 ° F	48 ° C
Max Intermittent Operating Temp		175 ° F	79 ° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- One year when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2015 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469