



## FASSON® 950 SILVER


10 mil industrial grade cloth tape used for sealing joints and seams in HVAC applications.

### FEATURES:

- Rubber based adhesive
- Scrim reinforced facestock
- Available in silver and black

### BENEFITS:

- Strong bond to a variety of substrates
- Tri-directional FSK reinforces seal
- Tested in accordance with UL 723
- Made in the USA

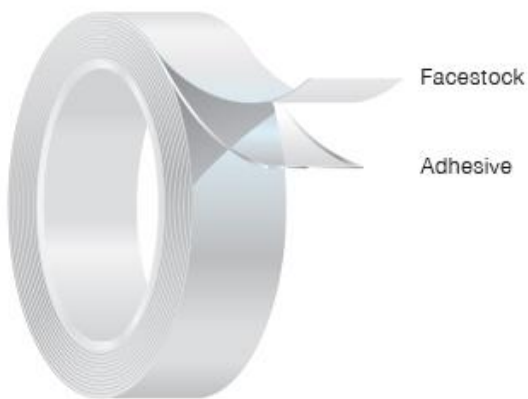

### CONSTRUCTION:

#### Carrier:

Scrim Facestock

#### Adhesive:

Rubber

**FASSON® 950 SILVER****Adhesive Properties:**

Thickness	Test Method(s): PSTC-133	Typical Values		
		US Mils	MM's	Microns (µm)
Adhesive:		2.1	0.05	53
Carrier:		8.0	0.20	203
Total Caliper:		10.1	0.26	256

**PEEL ADHESION**

Test Method(s): PSTC-101, ASTM D-3330, STD-10

Product 180° 12" min

Substrate		Lbf / In	US Oz / In	N / Meter
SS	Initial	4.0	64	700

**QUICK STICK**

Test Method(s): PSTC-101, ASTM D-3330, STD-10

Product 180° 12" / min

Substrate		Lbf / In	US Oz / In	N / Meter
SS	Initial	1.1	18	193

**TENSILE**

Test Method(s): PSTC-131, ASTM D-882, STD-3A,B,C

Product

Substrate		Lbf / In	US Oz / In	N / Meter
Product	MD	27.0	432	4728

**ELONGATION**

Test Method(s): PSTC-131, ASTM D-882, STD-3A,B,C

Product

Substrate		%		
Product	MD	16		

**STATIC SHEAR**

Test Method(s): PSTC-107, ASTM D 3654, STD-9

Product 1" sq (6.5 cm<sup>2</sup>) 2.2 lb (1.0 kg)

Substrate		Min to Fail		
SS	Initial	> 1,440		

**TEMPERATURES**

	° F	° C
Min Application Temp	10 ° F	-12 ° C
Max Continuous Operating Temp	120 ° F	48 ° C
Max Intermittent Operating Temp	175 ° F	79 ° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

**APPLICATION TECHNIQUES**

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

**STORAGE / SHELF LIFE**

- One year when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to [Tapes.AveryDennison.com](http://Tapes.AveryDennison.com) for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2015 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.

Performance  
Tapes

Asia Pacific  
Kunshan, China,  
NO. 618 Nanhe Road  
Kunshan Economic &  
Technological Zone  
China, 215335  
Phone: +86 512 57155001  
Fax: +86 512 57155059

Europe  
Tieblokkenlaan 1  
B-2300 Turnhout  
Belgium  
Phone: +32 (0)14 40 48 11  
Fax: +32 (0)14 40 48 55

North America  
250 Chester Street  
Painesville, Ohio  
44077 USA  
Phone: +1 866-462-8379  
Fax: +1 888-358-4469