




FT F2001 MAT

FT F2001 MAT is part of a transfer or unsupported pressure sensitive adhesive system for assembling purposes. The adhesives used are acrylic polymer or synthetic rubber based formulations.

FT F2001 MAT is protected by one or two silicone coated release liners.

CONSTRUCTION & TYPICAL APPLICATION

- Free film of solvent based pure acrylic adhesive protected on one side with a 95 gr kraft paper liner and on the other side with a 100 µ clear polyethylene mat film.
- Has medium tack and peel properties, and high shear resistance.
- For applications where high clarity is required: e.g. acrylic signs, taxi & car number plates, passports, etc.

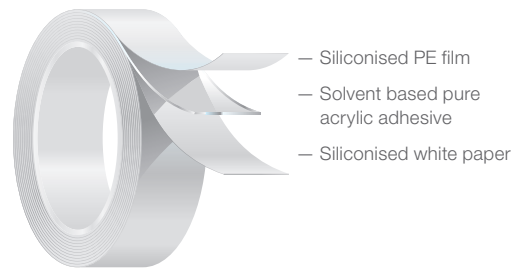

Adhesion with Substrates			
Metal / Aluminium	Medium	Acrylic / PET	Medium
Glass / Ceramics	Medium	Polystyrene	Medium
Painted Surface	Medium	PP / PE / PS	Medium
Wood / Board / Paper	Medium	Textile / Cotton	Medium
Soft PVC	Medium	Rubber / EPDM	Medium
Rigid PVC	Medium	Smooth Substrate	Medium
PC / ABS	Medium	Rough Substrate	Medium

RESISTANCE:

- Resistant to water, detergents, alcohol, aliphatic and some aromatic hydrocarbons. Medium resistance to plasticizers and high outdoor resistance. Not recommended for use in contact with ketones, esters or chlorinated hydrocarbons.

SHELF LIFE:

- 2 years when stored at 15/25° C and ± 50% relative humidity.

ADDITIONAL INFORMATION:

- Skin contact approval: The adhesive of F 2001 MAT has been lab tested and its Primary Irritation Index (P.I.I.) was calculated to be 0,1, « negligible irritating » in accordance with the criteria of ECETOC.
- Automotive approval: British Standard : BS AU145D.

FT F2001 MAT

ADHESIVE DATA	Typical Values*	Test Method
Quick Tack (N/25mm) on brushed stainless steel (ref. Nokoro 304 poli. N°4)	11	FTM 9
Peel 180° (N/25mm) on brushed stainless steel (ref. Nokoro 304 poli. N°4) - after 20 minutes - after 24 hours	12 14	FTM 1 FTM 1
Shear on brushed stainless steel (ref. Nokoro 304 poli. N°4) 1kg – 25mm x 25mm (hours)	500	FTM 8

CARRIER DATA	Typical Values*	Test Method
Carrier Free		

TEMPERATURE RESISTANCE	Typical Values*	Test Method
Minimum Application Temperature	+ 10°C	
End-use Temperature Range	- 30°C to + 100°C	
Short Term Resistance	+ 180°C	S.A.F.T. 500grs

RELEASE LINER	Typical Values*	Test Method
Clear PE Mat Film	100µ	ISO 534
White Silicone Paper	95 gr/sqm	ISO 534

THICKNESS	Typical Values*	Test Method
Carrier + Adhesive	43µ	ISO 534

*Values given are typical and are not necessarily for use in specifications.

APPLICATION TECHNIQUES:

- It is essential with all pressure-sensitive tapes the application surface is clean, dry and free of grease and oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (firm / rigid) surface achieves different performance

IMPORTANT NOTICE:

Information on the above characteristics is based upon tests we believe to be reliable. The values given are typical values that vary according to application conditions. The values are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine prior to use the suitability of this material for their specific purposes. All Avery Dennison materials described herein are sold subject to Avery Dennison Conditions of Sales, a copy of which is available upon request.

Please refer to [Tapes.AveryDennison.com](https://www.tapes.averydennison.com) for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2017 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance
Tapes

Asia Pacific
Kunshan, China,
No. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

Bld J.F. Kennedy 1
7060 Soignies
Belgium
Phone: +32 (0)14 404 963
Fax: +32 (0)14 40 48 55

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469

For more information on our bonding tapes and adhesive solutions,
visit [Tapes.AveryDennison.com](https://www.tapes.averydennison.com)