



AFB™ 6264B


Avery Dennison™ AFB™ 6264B is a black acrylic foam tape with double coated modified acrylic adhesive on both sides. This conformable foam adhesive bonds well to a broad range of medium to low surface energy paints and plastics, including many powder coated paints. Excellent shear strength and resistance to UV and elevated temperatures. Suitable for office furniture and telecommunication mounting, decoration and TV frame mounting.

FEATURES

- Foam tape with viscoelastic acrylic foam carrier
- Closed cell structure
- Acrylic adhesive system

BENEFITS

- High adhesion combined with good shear absorbs shock and distributes stress evenly
- Good moisture, UV and high temperature resistance
- Uniform bonding performance
- Helps eliminate the need for mechanical fasteners, drilling or grinding and related clean-up for certain applications
- Polyethylene liner helps provide good moisture stability and easier converting with its high tear strength

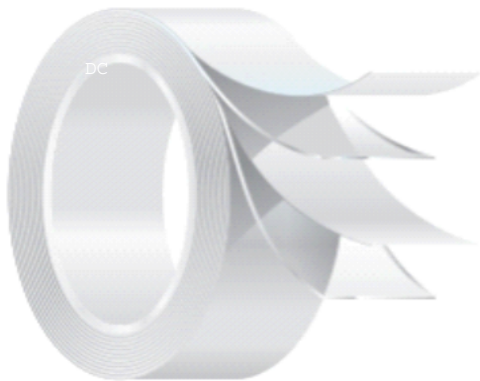

CONSTRUCTION:

Liner:

Red Polyethylene Liner with Imprinted Avery Logo

Adhesive 1:

Black Acrylic

Carrier:

Black Acrylic Foam Core

Adhesive 2:

Black Acrylic

AFB™ 6264B

Adhesive Properties:		Typical Values		
Thickness	ASTM D3652	US Mils	MM's	Micron's (µm)
Liner		5.1	0.13	130
Carrier & Adhesive		25.2	0.64	640
Total Caliper without Liner:		25.2	0.64	640
Total Caliper:		30.3	0.77	770

Peel Adhesion		ASTM D3330		
90° 12 in (300 mm) min @ Room Temp				
Substrate			Lbf / in	N / Meter
SS	Liner	20 min dwell	9.4	1,655
SS	Liner	72 hr dwell	13.3	2,342

Dynamic Shear		ASTM D1002		
180° 0.5 in (12.7 mm) / min @ Room Temp				
Substrate			Lbf / in	N / Meter
SS	Liner	72 hr dwell	114.6	20,181

Normal Tensile		ASTM D1002		
180° 2 in (50.8 mm) / min @ Room Temp				
Substrate			Lbf / in	N / Meter
Aluminum	Liner	72 hr dwell	113.1	19,917

Static Shear		ASTM D3654		
180° 1" sq (6.5 cm2) 500 g @ 194°F / 90°C				
Substrate			Min to Fail	
SS	Liner	Initial	> 10,000	

TEMPERATURES	° F	° C
Minimum Service Temperature	230° F	110° C
Maximum Service Temperature	302° F	150° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- One year when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2020 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469