



FT 1925FR


Avery Dennison FT 1925FR is a 4.4 mil transfer tape with a general purpose fire retardant acrylic adhesive. The adhesive bonds very well to low surface energy materials as well as foam and provide high flame resistance to even the most demanding requirements. FT 1925FR is used in aerospace and general bonding applications where flame resistance is required.

FEATURES

- Unsupported adhesive construction
- Fire retardant modified acrylic adhesive
- Super calendered kraft release liner

BENEFITS

- Conformability
- Resistant to flame propagation
- Can help meet many flame retardant requirements
- High strength with excellent die cutting performance

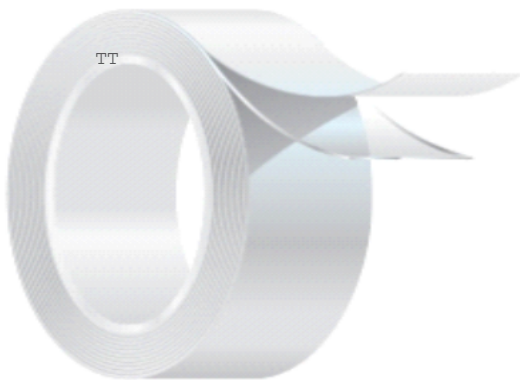

CONSTRUCTION:

Liner:

83# White Kraft

Adhesive:

Fire Retardant Acrylic

FT 1925FR

Adhesive Properties:		Typical Values		
Thickness	ASTM D-3652	US Mils	MM's	Micron's (µm)
Liner		4.6	0.12	117
Adhesive		4.4	0.11	112
Total Caliper without Liner:		4.4	0.11	229
Total Caliper:		9.0	0.23	112

Peel Adhesion		ASTM D1000		
180° 12 in (305 mm) / min				
Substrate		Lbf / In	N / Meter	
SS	72 hr dwell	6.2	1,092	
ABS	72 hr dwell	5.9	1,039	

Loop Tack		ASTM D6195		
180° 20 in (508 mm) / min				
Substrate		Lbf / In	N / Meter	
SS	Initial	4.7	828	

Static Shear		ASTM D3654		
180° 1" sq (6.5 cm2) 500 g				
Substrate		Mins to Fail		
SS	24 hr dwell	> 10,000		

TEMPERATURES	° F	° C
Minimum Application Temperature	50° F	30° C
Minimum Service Temperature	-60° F	-51° C
Maximum Service Temperature	350° F	175° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- One year when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2020 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Asia Pacific
 Kunshan, China,
 NO. 618 Nanhe Road
 Kunshan Economic &
 Technological Zone
 China, 215335
 Phone: +86 512 57155001
 Fax: +86 512 57155059

Europe
 Tieblokkenlaan 1
 B-2300 Turnhout
 Belgium
 Phone: +32 (0)14 40 48 11
 Fax: +32 (0)14 40 48 55

North America
 250 Chester Street
 Painesville, Ohio
 44077 USA
 Phone: +1 866-462-8379
 Fax: +1 888-358-4469