




## FT 8327 12 Pt Board

Avery Dennison™ FT 8327 12 Pt Board is a 4.6 mil double coated polyester with a foam bonding rubber adhesive on the laminating side and a high shear rubber adhesive on the mounting side and a heavy board release liner. It is designed for bonding a wide variety of foams to low surface energy materials. FT 8327 12 Pt Board is commonly used for appliance and general industrial applications.

### FEATURES

- Double coated tape construction with a differential adhesive system
- Multipurpose rubber adhesive on laminating side
- High shear rubber adhesive on mounting side
- Polyester film carrier
- 12 point poly coated kraft board release liner

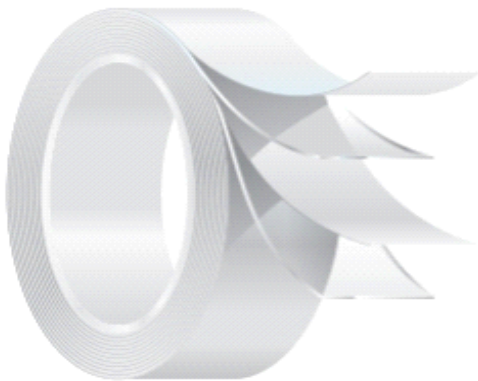

### BENEFITS

- Dimensional stability and good die cutting characteristics
- Excellent foam bonding performance on a wide variety of foams
- Strong bond to a wide variety of low surface energy materials and high heat resistance
- High tensile strength and good converting performance
- Heavyweight and stiffness allow for easy handling
- Two-year warranty

### CONSTRUCTION:

**Liner:**

Natural 12 Pt Board

**Adhesive 1:**

Rubber / Rubber

**Carrier:**

Polyester

**Adhesive 2:**

Rubber

**FT 8327 12 Pt Board**

Adhesive Properties:		Typical Values		
Thickness	ASTM D3652	US Mils	MM's	Micron's (µm)
Liner		12.9	0.33	328
Adhesive 1 - Liner		2.0	0.05	51
Carrier		0.5	0.01	13
Adhesive 2 - Unwind		2.5	0.06	64
Total Caliper without Liner:		5.0	0.13	127
Total Caliper:		17.9	0.45	455
Peel Adhesion		ASTM D3330		
180° 12 in (300 mm) min @ Room Temp				
Substrate		Lbf / in	N / Meter	
SS	Liner 72 hr dwell	8.0	1,409	
	Unwind	8.0	1,409	
PP	Liner 72 hr dwell	7.0	1,233	
	Unwind	6.0	1,057	
Loop Tack		ASTM D6195		
180° 32 in (508 mm) / min @ Room Temp				
Substrate		Lbf / in	N / Meter	
SS	Liner Initial	12.0	2,113	
Static Shear		ASTM D3654		
180° 1" sq (6.5 cm2) 500 g @ Room Temp				
Substrate		Min to Fail		
SS	Liner 24 hr dwell	> 10,000		
TEMPERATURES		° F	° C	
Minimum Application Temperature		50° F	10° C	
Minimum Service Temperature		-40° F	-40° C	
Maximum Service Temperature		175° F	80° C	

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

**APPLICATION TECHNIQUES**

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

**STORAGE / SHELF LIFE**

- Two years when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to [Tapes.AveryDennison.com](https://www.tapes.averydennison.com) for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2020 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.

Performance  
Tapes

Asia Pacific  
Kunshan, China,  
NO. 618 Nanhe Road  
Kunshan Economic &  
Technological Zone  
China, 215335  
Phone: +86 512 57155001  
Fax: +86 512 57155059

Europe  
Tieblokkenlaan 1  
B-2300 Turnhout  
Belgium  
Phone: +32 (0)14 40 48 11  
Fax: +32 (0)14 40 48 55

North America  
250 Chester Street  
Painesville, Ohio  
44077 USA  
Phone: +1 866-462-8379  
Fax: +1 888-358-4469