



FASSON® 0817


Avery Dennison FASSON® 0817 is suitable for die-cut shapes, shielding, moisture and vapor barrier sealing components or lamination to insulation materials.

FEATURES

- Dead-soft 2 mil foil facestock
- Quick stick, cold-temperature rubber adhesive
- Strong bleached densified kraft liner

BENEFITS

- Strong bond to a variety of substrates
- Conformability to curved surfaces
- Exceptional cold environment adhesion conditions
- Tested in accordance with UL 723
- Made in the USA

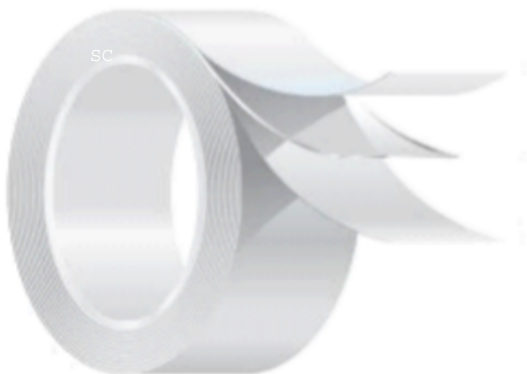

CONSTRUCTION:

Liner:

50# White Kraft

Adhesive:

Rubber

Carrier:

Aluminum Foil



General Use Tape Surface Burning Characteristics to

UL 723	Flame Spread	10
722S	Smoke Developed	15

FASSON® 0817

Adhesive Properties:		Typical Values		
Thickness	ASTM D3652	US Mils	MM's	Micron's (µm)
Liner		3.2	0.08	81
Adhesive		2.0	0.05	51
Carrier		2.0	0.05	51
Total Caliper without Liner:		4.0	0.10	102
Total Caliper:		7.2	0.18	183

Peel Adhesion		ASTM D3330		
180° 12 in (300 mm) min @ Room Temp				
Substrate	Initial	Lbf / in	N / Meter	
SS		4.9	863	

Loop Tack		ASTM D6195		
180° 20 in (508 mm) / min @ Room Temp				
Substrate	Initial	Lbf / in	N / Meter	
SS		12.0	2,113	

Static Shear		ASTM D3654		
180° 1" sq (6.5 cm ²) 1000 g @ Room Temp				
Substrate	Initial	Min to Fail		
SS		> 10,000		

TEMPERATURES	° F	° C
Minimum Application Temperature	50° F	10° C
Maximum Continuous Operating Temperature	175° F	79° C
Maximum Intermittent Operating Temperature	200° F	95° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES


- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- One year when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2022 Avery Dennison® Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison® Corporation. All other Avery Dennison® brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison® Corporation.

 <p>PERFORMANCE TAPES</p>	<p>Asia Pacific Kunshan, China, NO. 618 Nanhe Road Kunshan Economic & Technological Zone China, 215335 Phone: +86 512 57155001 Fax: +86 512 57155059</p>	<p>Europe Tieblokkenlaan 1 B-2300 Turnhout Belgium Phone: +32 (0)14 40 48 11 Fax: +32 (0)14 40 48 55</p>	<p>North America 250 Chester Street Painesville, Ohio 44077 USA Phone: +1 866-462-8379 Fax: +1 888-358-4469</p>
---	--	--	---