



FASSON® 0950 BLACK


Avery Dennison™ FASSON® 0950 Black is a 10 mil industrial grade cloth tape used for sealing joints and seams in HVAC applications.

FEATURES

- Rubber based adhesive
- Scrim reinforced facestock
- Available in silver and black

BENEFITS

- Strong bond to a variety of substrates
- Tri-directional FSK reinforces seal
- Tested in accordance with UL 723
- Made in the USA

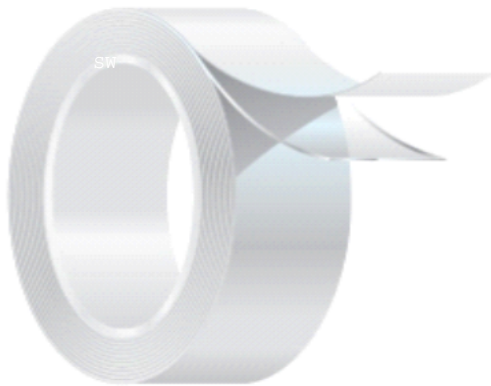

CONSTRUCTION:

Facestock:

Black Scrim Facestock

Adhesive:

Rubber

FASSON® 0950 BLACK**Adhesive Properties:****Typical Values**

Thickness	ASTM D3652	US Mils	MM's	Micron's (µm)
Adhesive		2.1	0.05	53
Carrier		8.0	0.20	203
Total Caliper:		10.1	0.26	257

Peel Adhesion

ASTM D3330

180° 12 in (305 mm) / min

Substrate		Lbf / In	N / Meter
SS	Initial	4.0	704

Quick Stick

180° 12 in (305 mm) / min

Substrate		Lbf / in	N / Meter
SS	Initial	1.1	194

Static Shear

ASTM D3654

180° 1" sq (6.5 cm2) 1000 g @ Room Temp

Substrate		Mins to Fail	
SS	Initial	> 1,440	

Tensile Elongation

ASTM D882

180° 2 in (50.8 mm) / min

Substrate		Lbf / In	N / Meter
Product	Tensile Machine Direction	27.0	4,755
	Elong %	16 %	16 %

TEMPERATURES

	° F	° C
Minimum Application Temperature	10° F	-12° C
Maximum Continuous Operating Temperature	120° F	49° C
Maximum Intermittent Operating Temperature	175° F	80° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- One year when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2020 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.

Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469