



FASSON® 0955


Avery Dennison™ FASSON® 0955 is designed to provide the surface of a foil tape and the easy application of a cloth tape for use on duct work.

FEATURES

- Aggressive rubber based adhesive
- Metalized polycoated cloth

BENEFITS

- Aggressive tack and adhesion
- Airtight, moisture-free seal
- Tested in accordance with UL 723

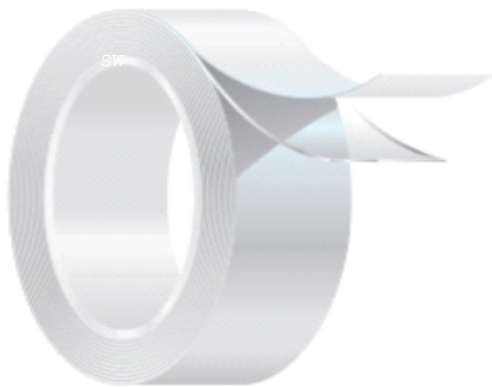

CONSTRUCTION:

Facestock:
Metalized Poly-coated Cloth

Adhesive:
Rubber

FASSON® 0955

Adhesive Properties:		Typical Values		
Thickness	ASTM D3652	US Mils	MM's	Micron's (µm)
Adhesive		2.1	0.05	53
Carrier		10.4	0.26	264
Total Caliper without Liner:		12.5	0.32	318
Total Caliper:		12.5	0.32	318

Peel Adhesion		ASTM D3330		
180° 12 in (305 mm) / min				
Substrate	Initial	Lbf / In	N / Meter	
SS		3.0	528	

Static Shear		ASTM D3654		
180° 1" sq (6.5 cm2) 1000 g @ Room Temp				
Substrate	Initial	Mins to Fail		
SS		> 15		

Static Shear		ASTM D3654		
180° 1" sq (6.5 cm2) 2500 g @ Room Temp				
Substrate	Initial	Mins to Fail		
SS		> 50		

Tensile Elongation		ASTM D882		
180° 2 in (50.8 mm) / min				
Substrate	Tensile	Machine Direction	Lbf / In	N / Meter
Product			2	282
	Elong %		14 %	14 %

TEMPERATURES	° F	° C
Minimum Application Temperature	0° F	-18° C
Maximum Continuous Operating Temperature		
Maximum Intermittent Operating Temperature		

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- One year when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2020 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469