



FT 4260


Avery Dennison™ Avery Dennison FT 4260 is a single coated waterproof flashing tape with excellent initial tack and all weather adhesive adhesion. This product is conformable around openings, wall penetrations, and is self sealing. When punctured by hand driven fasteners it prevents moisture intrusion. The extremely aggressive adhesive can even bond to damp surfaces.

FEATURES

- Single coated polyolefin facestock
- High tack acrylic adhesive
- Low vapor transmission rate
- All weather adhesive can be installed from 0°F to 120°F
- Densified kraft release liner

BENEFITS

- Conformable, self sealing, and puncture resistant
- Adheres to a wide variety of building materials and sealants
- Resists UV exposure for up to 6 months
- "No mess" adhesive doesn't melt or stain at high temperatures

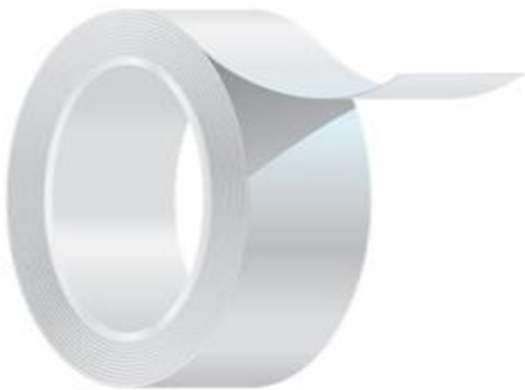

CONSTRUCTION:

Facestock:

LDPE

Adhesive:

High-Tack Acrylic

Adhesive Properties:		Typical Values		
Thickness	ASTM D3692	US Mils	MM's	Micron's (µm)
Facestock		3.6	0.09	91
Adhesive		3.0	0.08	76
Carrier		3.0	0.08	76
Total Caliper:		9.6	0.24	244

Peel Adhesion		ASTM D3330		
180° 12 in (300 mm) min @ Room Temp				

Substrate		Lbf / in	N / Meter
SS	24 HR DWELL	10.8	1,902

Loop Tack		ASTM D6195		
180° 20 In (508 mm) / min @ Room Temp				

Substrate		Lbf / In	N / Meter
SS		4.2	740

Loop Tack		ASTM D6195		
180° 20 In (508 mm) / min @ Room Temp				

Substrate		Lbf / In	N / Meter
SS		4.2	740

MVTR			
Substrate			
PRODUCT			
		0.7	

Nail Sealability			
@ Room Temp			
		UNITS	
	After Thermal Cycling	Pass	

TEMPERATURES			
		° F	° C
Minimum Application Temperature		0° F	-18° C
Maximum Continuous Operating Temperature		200° F	93° C
Maximum Intermittent Operating Temperature		175° F	80° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- One year when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to [Tapes.AveryDennison.com](https://www.tapes.averydennison.com) for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2023 Avery Dennison® Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison® Corporation. All other Avery Dennison® brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison® Corporation.



Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
+86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
+32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

North America
250 Chester Street
Painesville, Ohio
44077 USA
+1 866-462-8379
Fax: +1 888-358-4469