



FT 8299


Avery Dennison FT 8299 is a double coated tissue with a high performance acrylic laminating adhesive designed to be environmentally friendly with reduced odor and lower VOC's than typical PSA tapes.

FEATURES

- Double Coated Tape Construction
- Low outgassing high performance acrylic adhesive

BENEFITS

- Dimensional stability and good die cutting characteristics
- Flexible and conformable with hand tearability
- Good balance of peel, tack, and shear
- Excellent bond to polyurethane foams
- Meets OEM low VOC requirements with low odor
- 2 Year Warranty

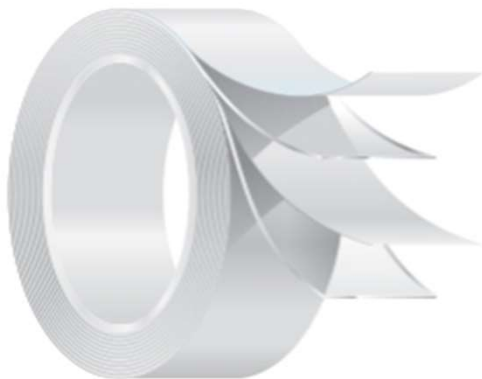

CONSTRUCTION:

Liner:

78# White Kraft

Adhesive 1:

Low VOC Acrylic

Carrier:

Tissue

Adhesive 2:

Low VOC Acrylic

FT 8299

Adhesive Properties:		Typical Values		
Thickness	ASTM D3652	US Mils	MM's	Micron's (µm)
Liner		4.5	0.11	114
Adhesive 1 - Liner		2.0	0.05	51
Carrier		1.0	0.03	25
Adhesive 2 - Unwind		2.0	0.05	51
Total Caliper without Liner:		5.0	0.13	127
Total Caliper:		9.5	0.24	241

Peel Adhesion		ASTM D3330		
180° 12 in (300 mm) min @ Room Temp				
Substrate			Lbf / in	N / Meter
SS	LINER	INITIAL	4.7	828
	UNWIND		4.7	828

Peel Adhesion		ASTM D3330		
180° 12 in (300 mm) min @ Room Temp				
Substrate			Lbf / in	N / Meter
SS	LINER	24 HR DWELL	5.0	881
	UNWIND		5.0	881

Peel Adhesion		ASTM D3330		
180° 12 in (300 mm) min @ Room Temp				
Substrate			Lbf / in	N / Meter
PP	LINER	INITIAL	4.4	775
	UNWIND		4.4	775

Peel Adhesion		ASTM D3330		
180° 12 in (300 mm) min @ Room Temp				
Substrate			Lbf / in	N / Meter
PP	LINER	24 HR DWELL	4.7	828
	UNWIND		4.7	828

Static Shear		ASTM D3654		
1" x 1" (6.5 cm ²) 1000g				
Substrate			Minutes to fail	
SS	LINER	72 HR DWELL	> 1440	

TEMPERATURES	° F	° C
Minimum Application Temperature	50° F	10° C
Minimum Service Temperature	-40° F	-40° C
Maximum Service Temperature	325° F	165° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- Two years when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2023 Avery Dennison® Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison® Corporation. All other Avery Dennison® brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison® Corporation.



Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
+86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
+32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

North America
250 Chester Street
Painesville, Ohio
44077 USA
+1 866-462-8379
Fax: +1 888-358-4469