



FT 7358


Fastape™ 7358 is manufactured with a differential removable acrylic and permanent rubber adhesive system. Designed for polishing pad applications

FEATURES:

- High tack rubber based adhesive
- Excellent removable acrylic adhesive providing good creep resistance and clean removability.

BENEFITS:

- Easy release liner
- Improved die-cutting characteristics
- Matrix strippable
- Reinforces the polishing material

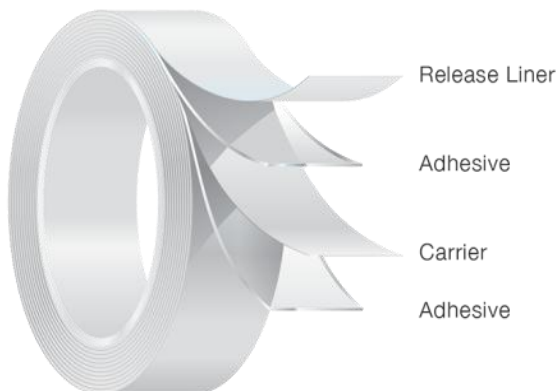

CONSTRUCTION:

Liner:

Glassine

Adhesive 1 Liner:

Removable Acrylic

Carrier:

Polyester

Adhesive 2 Uwind:

Permanent Rubber

FT 7358

Adhesive Properties:		Typical Values	
Thickness	Test Method(s): PSTC-133	US Mils	MM's
Liner:		3.2	0.08
Adhesive 1 Liner:		1.6	0.04
Carrier:		0.5	0.01
Adhesive 2 Uwind:		1.3	0.03
Total Caliper:		6.6	0.17

PEEL ADHESION		Test Method(s): PSTC-101, ASTM D-3330, STD-10		
2 mil PET 180° 12" min				
Substrate		Lbf / In	US Oz / In	N / Meter
SS	Liner Initial	3.2	51	560
	Unwind Initial	6.7	107	1173
Painted Steel	Liner Initial	3.9	62	683
	Unwind Initial	14.3	229	2501
Polycarbonate	Liner Initial	3.8	62	673
	Unwind Initial	15.0	240	2626
PP	Liner Initial	2.3	36	399
	Unwind Initial	13.0	209	2283

LOOP TACK		Test Method(s): PSTC-16, STD-7		
2 mil PET 20" min				
Substrate		Lbf / In	US Oz / In	N / Meter
SS	Liner Initial	3.1	49	540
	Unwind Initial	10.3	166	1811

STATIC SHEAR		Test Method(s): PSTC-107, ASTM D 3654, STD-9	
2 mil PET 1" sq (6.5 cm ²) 1000 g			
Substrate		Min to Fail	
SS	Liner Initial	> 1,000	
	Unwind Initial	> 10,000	

TEMPERATURES	° F	° C
Min Application Temp	50 ° F	10 ° C
Max Continuous Operating Temp	131 ° F	55 ° C
Max Intermittent Operating Temp	158 ° F	70 ° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- Two years when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2013 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. Avery™ and all other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Performance
Tapes

Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

South America
Rua Francisco Foga, 225
13280-000 Vinhedo
SP Brazil
Phone: +55 19 3876 7736
Fax: +55 19 3876 7682

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469